



of BELMONDO® Basic, Classic, Trend, Kingsize Cover, Walkpro, Paddock, Horsewalker, Motion, Step

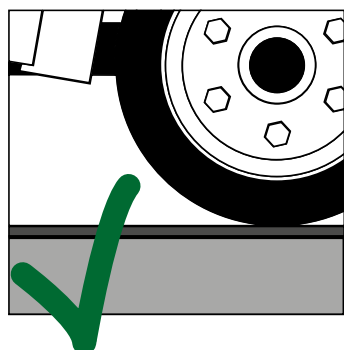

right

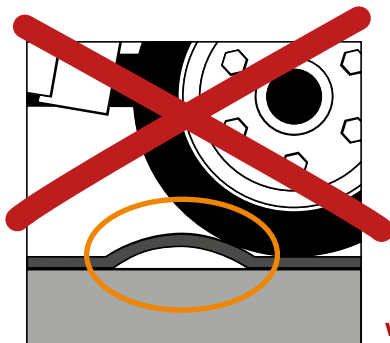

wrong



No visible bow wave should form!

Prerequisites:

► Tyres:


Vehicle weight, tyre width and required tyre pressure are all related. Therefore, the **required inflation pressure of the authorized tyres** is: **maximum 2.5 bar**



If the tyres need to be adapted:
approval by the vehicle manufacturer is necessary!

► Subsurface:

- maximum slope: 2 %
(BELMONDO® Step only: up to 10 %)



General framework:

► Driving mode:

- maximum speed = half walking speed (about 2 km/h)
- no abrupt steering actions, do not steer while standing still
- slow acceleration and gentle braking

► The mat edges must be protected at the beginning and at the end of the alley!

Especially for BELMONDO® Step:

BELMONDO® Step can be driven on **up to max. 10 % slope** with standard equipment such as farm yard loader or tractor.

Notice:

- only drive straight / do not steer any radius
- do NOT accelerate or brake rapidly on the mat