


## Comfort and hygiene

The comfortable BELMONDO® Trend meets high requirements: The heat-insulating air-cushion structure ensures a horse-friendly soft, shock-absorbing ground. The special elasticity provides support when getting up and lying down. At the same time, the horse can step on a flat surface and stand stable. BELMONDO® Trend is frequently used when animals need more softness and support due to diseases such as founder or osteoarthritis. It is also ideal for older horses. The soft surface structure helps to reduce chafing, especially among sensitive horses, to a minimum. The mats are designed for looseboxes and lying areas (e.g. in open stables) and are compatible with vehicle traffic. Thanks to the precise puzzle interlock system, they can be simply installed using a floating method. Rubber ridges on the lower side additionally ensure better hygiene.



- For high requirements
- Improved sure-footedness
- Less bedding > less dust, manure and work

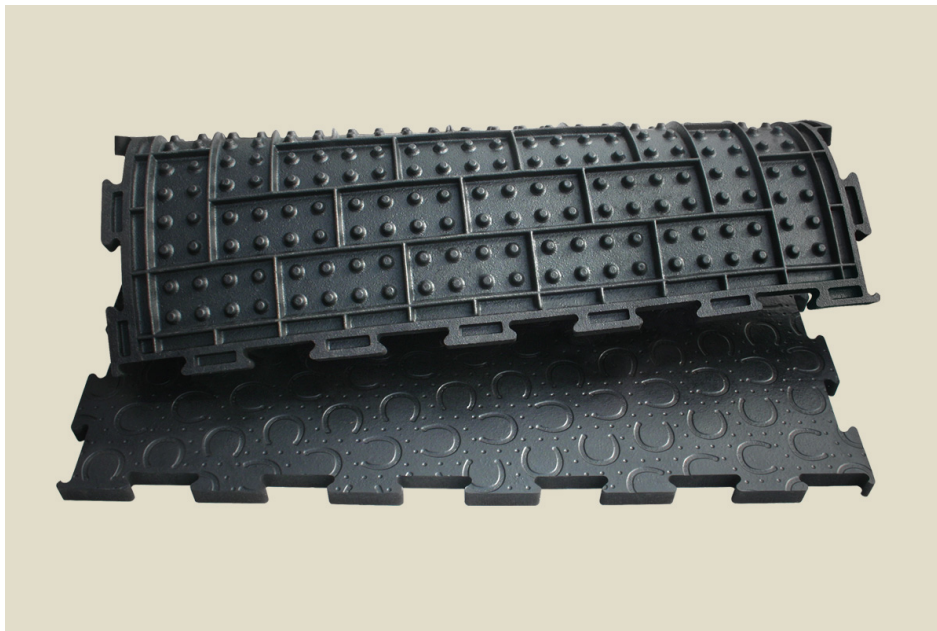

## BELMONDO® Trend: Technical data

Dimensions	Thickness	Width	Length
4-sided puzzle	28 mm	1 m	1 m

## Installation

**BELMONDO® horse mats can be simply installed on any paved ground. Normally, fixing the mats to the floor is not necessary (floating installation method).** Due to their weight and the precise puzzle interlock system, the mats remain stable on the floor. Edge offcuts can often be used in other places, thereby minimizing waste!

[Installation instructions](#)

Suitable for every type of shoe.

## Compatibility with vehicle traffic

**BELMONDO® Trend is compatible with vehicle traffic, e.g. farm yard loader or tractor with authorized pneumatic tires for recommended inflation pressure up to max. 2.5 bar.** (Note: Drive with the necessary caution and ensure adequately large turning radii!)

[Vehicle traffic specifications](#)

## Maintenance tip

**To bind liquids, a small amount of absorbent bedding is always required.** The actual amount required depends on the type of bedding, the individual behavior of the horse and the stable climate.

**Treatment with a high-pressure cleaner and standard cleaning agents possible.** The interlocked single mats can simply be folded up or removed for basic cleaning and subsequently re-installed.


Optional accessory: VITA Top	Height	Width	Length
Covering strip as optical border towards the wall	5 cm	5.5 cm	200 cm

## Installation VITA Top

Installation on the wall: Fix every 40 cm in the position groove

KRAIBURG fixings: Spax screws  $\varnothing$  5 x 60 mm (are supplied)

If required, use suitable plugs for the type of wall.



## Tolerances

Thickness: +3/-2 mm

Width + length: +/- 1,5 % (DIN ISO 3302-1 tolerance class M4)

Please refer to the relevant KRAIBURG specifications and installation instructions, which provide valuable hints and tips.

### Loosebox Lying area

More technical details on request. The products featured here are exclusively intended for the demonstrated applications. Technical details subject to change. Our General Terms and Conditions apply. Legal basis is the German version of the document.