


Safety and more calmness

BELMONDO® Walkpro ensures more safety and calmness in stable walkways as well as in service areas, such as washdown and grooming areas or solarium. Its elasticity protects hooves and joints and guarantees improved sure-footedness even when wet. The appealing mosaic design surface is easy to sweep clean with a brush. Also pleasant: The loud clattering of hooves in the stable is reduced significantly. Thanks to its top coat, the puzzle mat is suitable for high loads, and digging does not pose a problem for the floor. BELMONDO® Drain gutter and BELMONDO® Gully – special pre-cut elements for drain gutters and gullies – allow liquids to drain away quickly in the washdown area. This helps to prevent trip hazards and to cover metal surfaces.



- Modern appearance
- Low-maintenance surface
- Improved grip when wet
- Compatible with vehicle traffic

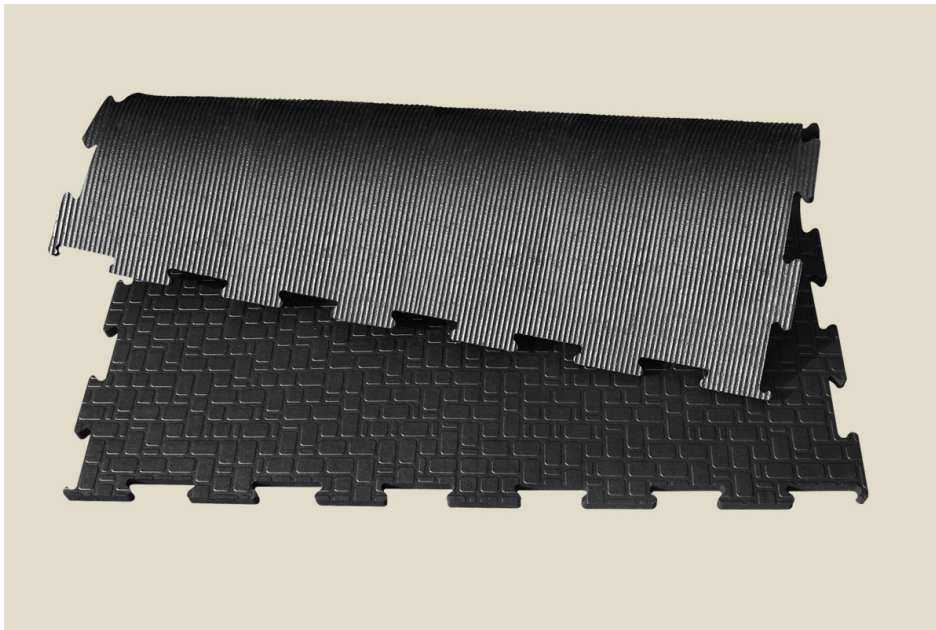

BELMONDO® Walkpro: Technical data

Dimensions	Thickness	Width	Length
4-sided puzzle	16 mm	1 m	1 m

Installation

BELMONDO® horse mats can be simply installed on any paved ground. Normally, fixing the mats to the floor is not necessary (floating installation method). Due to their weight and the precise puzzle interlock system, the mats remain stable on the floor. Edge offcuts can often be used in other places, thereby minimizing waste!
[Installation instructions](#)

Suitable for every type of shoe.

Compatibility with vehicle traffic

BELMONDO® Walkpro is compatible with vehicle traffic, e.g. farm yard loader or tractor with authorized pneumatic tires for recommended inflation pressure up to max. 2.5 bar. (Note: Drive with the necessary caution and ensure adequately large turning radii!)
[Vehicle traffic specifications](#)

Maintenance tip

Treatment with a high-pressure cleaner and standard cleaning agents possible. The interlocked single mats can simply be folded up or removed for basic cleaning and subsequently re-installed.

Optional accessories: BELMONDO® Drain gutter / Gully

cut from BELMONDO® Walkpro or BELMONDO® Paddock

Drain gutter 16.7 x 100 cm
[Go to product](#)

Gully 40 x 40 cm
[Go to product](#)

Tolerances

Thickness: +3/-2 mm
Width + length: +/- 1,5 % (DIN ISO 3302-1 tolerance class M4)

Please refer to the relevant KRAIBURG specifications and installation instructions, which provide valuable hints and tips.

More technical details on request. The products featured here are exclusively intended for the demonstrated applications. Technical details subject to change. Our General Terms and Conditions apply. Legal basis is the German version of the document.

