
BELMONDO® Paddock

The all-rounder – especially for outdoors

Loosebox paddock **Washdown area** **Paved walkways**

Ideal for key areas

BELMONDO® Paddock is our all-rounder for outdoor areas. The rhombic profile on the surface guarantees improved sure-footedness even when wet and is easy to clean. The lower side equipped with studs fulfills several functions: For the horse, it works as a shock absorber and also improves grip for its hooves. The studs also provide good drainage beneath the mat. The elasticity of the mat ensures the movement of the horses breaks up and makes it easy to remove frozen matter in winter. The weather and UV-resistant top coat makes BELMONDO® Paddock particularly robust and durable. That is why it is also often used in countries with hot climate conditions. It ensures safety in loosebox paddocks as well as in service areas, such as washdown and grooming areas or solarium. BELMONDO® Drain gutter and BELMONDO® Gully – special pre-cut elements for drain gutters and gullies – allow liquids to drain away quickly in the washdown area. This helps to prevent trip hazards and to cover metal surfaces. The puzzle mats are also a great choice on paved walkways and are easy to install.

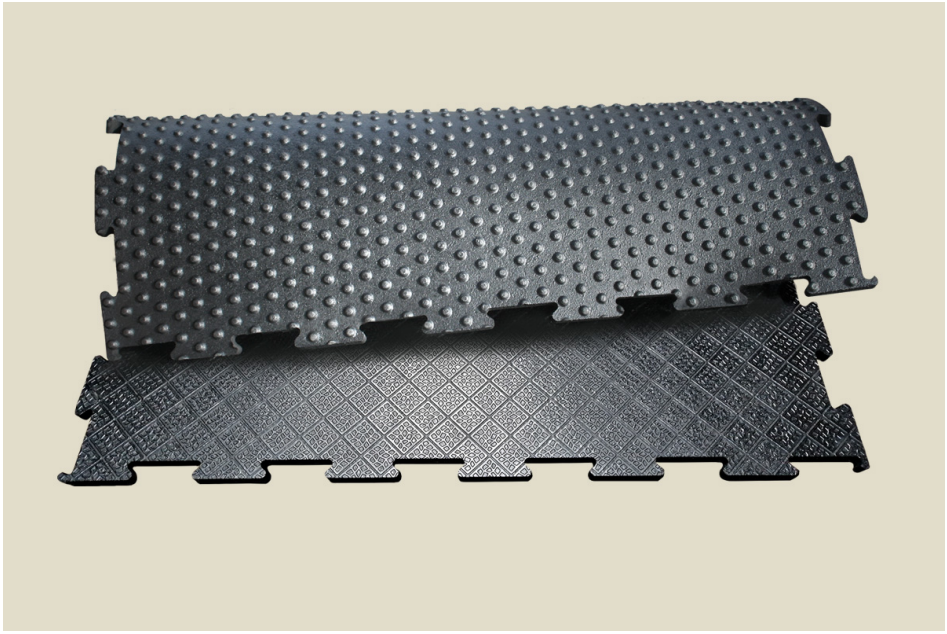

- **Safety and comfort in all weather conditions**
- **Solid rubber mat is easy to clean**
- **Suitable for vehicle traffic**

BELMONDO® Paddock: Technical data

Gummiwerk KRAIBURG Elastik GmbH & Co. KG

Göllstraße 8 | 84529 Tittmoning, Germany | Phone: +49 8683 701-303 | E-mail: belmondo@kraiburg-elastik.de

kraiburg-belmondo.com

Dimensions	Thickness	Width	Length
4-sided puzzle	24 mm	1 m	1 m

Installation

BELMONDO® horse mats can be simply installed on any paved ground. Normally, fixing the mats to the floor is not necessary (floating installation method). Due to their weight and the precise puzzle interlock system, the mats remain stable on the floor. Edge offcuts can often be used in other places, thereby minimizing waste!
Installation instructions

Suitable for every type of shoe.

Compatibility with vehicle traffic

BELMONDO® Paddock is compatible with vehicle traffic, e.g. farm yard loader or tractor with authorized pneumatic tires for recommended inflation pressure up to max. 2.5 bar. (Note: Drive with the necessary caution and ensure adequately large turning radii!)
Vehicle traffic specifications

Maintenance tip

Treatment with a high-pressure cleaner and standard cleaning agents possible. The interlocked single mats can simply be folded up or removed for basic cleaning and subsequently re-installed.

Optional accessories: BELMONDO® Drain gutter / Gully

cut from BELMONDO® Walkpro or BELMONDO® Paddock

Drain gutter 16.7 x 100 cm
Go to product

Gully 40 x 40 cm
Go to product

Tolerances

Thickness: +3/-2 mm
Width + length: +/– 1,5 % (DIN ISO 3302–1 tolerance class M4)

Please refer to the relevant KRAIBURG specifications and installation instructions, which provide valuable hints and tips.

More technical details on request. The products featured here are exclusively intended for the demonstrated applications. Technical details subject to change. Our General Terms and Conditions apply. Legal basis is the German version of the document.

Care and usage instructions:
Our flooring for horse husbandry is tested for its slip resistance under defined test conditions. However, the actual slip resistance in practical use depends on the relevant environmental and usage conditions. Especially moisture, dirt, mud, ice or snow, the slope, the condition of the ground and wear or damage can adversely affect performance characteristics. Individual factors such as hoof condition, shoe, health status and the animals' movement behavior also affect slip resistance. Surfaces must therefore be checked regularly according to the relevant usage conditions, maintained and kept in proper condition.