


For steep passages

BELMONDO® Step is specially designed for steep walkways. With its V-shaped, raised rib profile, it offers more grip and also facilitates the drainage of liquids. The square imprinting between the ribs provides extra grip. The weather and UV-resistant top coat makes BELMONDO® Step particularly robust and durable. The elasticity of the mat ensures the movement of the horses breaks up and makes it easy to remove frozen matter in winter. The mats can be installed on indoor or outdoor ramps and sloping walkways. An at least 10 cm thick concrete surface is required to fix the mats properly in place. In practice, it has been used safely on slopes of up to 15%.



- Extra good grip
- Can be walked on in both directions
- Compatible with vehicle traffic up to a max. 10% slope with standard equipment, e.g. farm yard loader or tractor

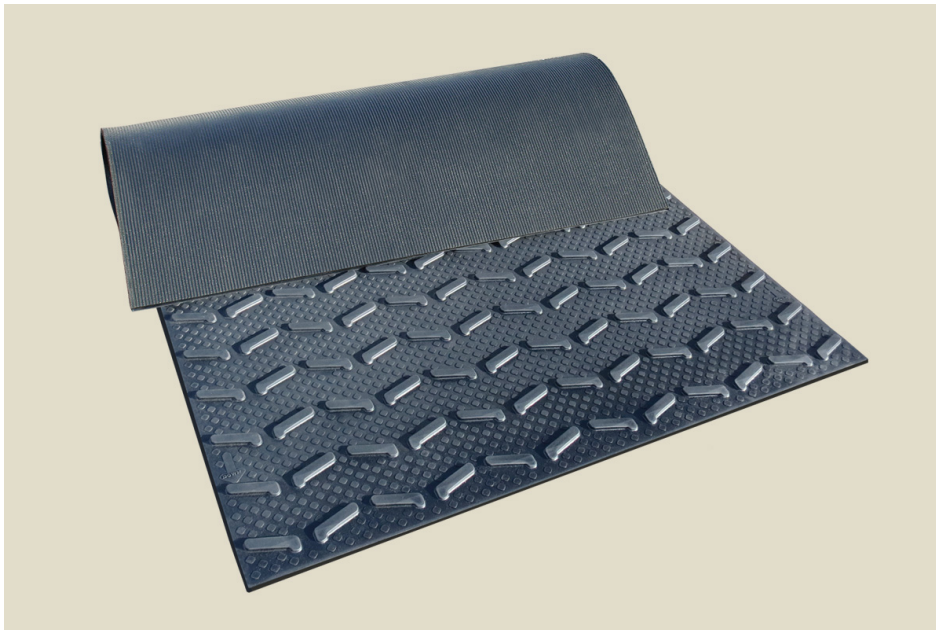

BELMONDO® Step: Technical data

Dimensions	Thickness	Width	Length
	24 mm	65/130 cm	200 cm

Floor prerequisites

Concrete surface: At least 10 cm thick and smooth For applications other than those mentioned, the suitability as well as the actual installation must be checked.

Application area

Steep passages with slopes above 6% grade

In practice, tested on slopes up to 15% grade

Installation and fixing

Single mats are very easy to handle

[Installation instructions](#)

Min. 9 fixings / narrow mat or 10 fixings / wide mat

KRAIBURG fixing system: Stable and secure, rounded and countersunk

Suitable for every type of shoe.

Compatibility with vehicle traffic

BELMONDO® Step is compatible up to 10 % grade with vehicle traffic, e.g. farm yard loader or tractor with authorized pneumatic tires for recommended inflation pressure up to max. 2.5 bar.

[Vehicle traffic specifications](#)

Protect the mat edges at the beginning and end of the mat surface.

Note:

Max. half walking speed (approx. 2 km/h)

Compatibility with vehicle traffic

Only drive straight ahead / do not steer in a radius

Do not accelerate or brake quickly on the mat

Maintenance tip

Keep mats as clean as possible. Essential for hoof health and slip resistance!

Treatment with a high-pressure cleaner and standard cleaning agents possible.

Tolerances

Thickness: +3/-2 mm

Width + length: +/- 1,5 % (DIN ISO 3302-1 tolerance class M4)

Please refer to the relevant KRAIBURG specifications and installation instructions, which provide valuable hints and tips.

More technical details on request. The products featured here are exclusively intended for the demonstrated applications. Technical details subject to change. Our General Terms and Conditions apply. Legal basis is the German version of the document.